
## **HOW TO INSTALL A SECOND METER?**

## LICENSED PLUMBER PROCEDURE

**INSTALLATION** 

**PROCESS** 

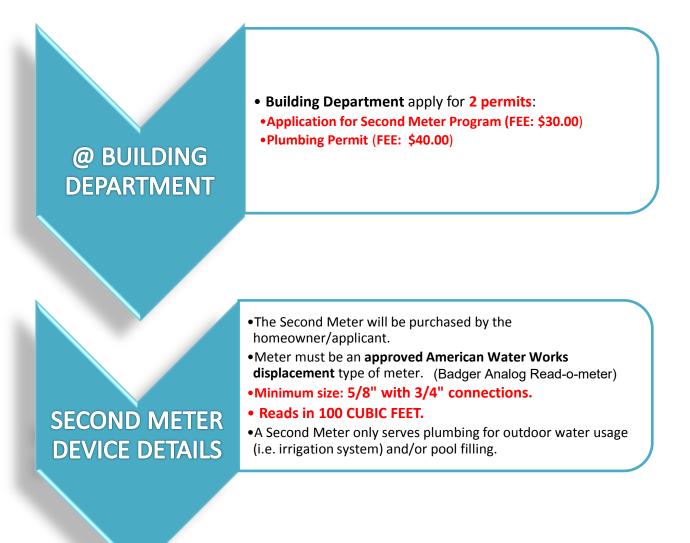

- •Meter installation must be leak-tight.
- •Meter must be installed in a horizontal position.
- Meter must be installed **DOWNSTREAM**, **AFTER**, the Dedham-Westwood Water District's Meter.
- •Meter location must be accessible for service and inspection.
- •Meter will be in a location protected from frost and freezing.
- •Provide an **upstream and downstream** ball type shutoff valve of high quality with low pressure loss.
- •See Second Water Meter Configuration for reference.