

PLANT LIST

SYMBO	L BOTANICAL NAME	COMMON NAME	QTY	SIZE
DECIDU	OUS TREES	,		
AR	ACER RUBRUM	RED MAPLE	2	3 1/2"-4" CAL
EVERG	_ REEN TREES			
PP	PICEA PUNGENS 'GLAUCA'	COLORADO BLUE SPRUCE		10-12' HT.
ORNAMI	_ ENTAL TREES			
CC	CERCIS CANADENSIS	EASTERN REDBUD	2	8-10 HT.
SHRUBS CS	# GRASSES CORNUS SERICEA	REDTWIG DOGWOOD	q	2 - 2 I/2" HT.
SV	SYRINGA VULGARIS 'ALBA'	COMMON LILAC (WHITE)	31	2 - 2 1/2" HT.
MG	MISCANTHUS GRACILLIMUS	MAIDEN GRASS	42	#3 POT.
JC	JUNIPEROUS CHINENSIS "SARGENTII"	SARGENT JUNIPER	28	15 - 18" SP.
RBD	RHODODENDRON 'BOULE DE NEIGE'	'BOULE DE NIEGE' RHODODENDRON	7	2 - 2 I/2' HT.
1G	ILEX GLABRA 'DENSA'	INKBERRY	30	18 - 24" HT.
PERENN	IIALS			
RF	RUDBECKIA FULGIDA	BLACK EYED SUSAN	200	#2 POT
DL	HEMOROCALIS ICE CARNIVAL	DAYLILY	150	#2 POT
EC	ECHINACEA - PURPLE CONE FLOWER	VARIETY	200	#2 POT
AM	ACHILEA - YARROW	VARIETY	150	#2 POT


NOTE: LOCATE PERENNIALS IN PROPOSED PLANT BEDS AS DIRECTED BY LANDSCAPE ARCHITECT IN THE FIELD.

PLANTING NOTES

- PRIOR TO THE START OF ANY EXCAVATION FOR THE PROJECT BOTH ON AND OF THE SITE, THE CONTRACTOR SHALL NOTIFY DIGSAFE AND BE PROVIDED WITH A DIGSAFE NUMBER INDICATING THAT ALL EXISTING UTILITIES HAVE BEEN LOCATED AND MARKED.
- 2. CONTRACTOR SHALL BEGIN MAINTENANCE IMMEDIATELY AFTER PLANTING AND WILL CONTINUE UNTIL FINAL ACCEPTANCE.
- 3. CONTRACTOR SHALL VERIFY ALL TREE REMOVALS WITH LANDSCAPE ARCHITECT PRIOR TO CONSTRUCTION START.
- 4. CONTRACTOR SHALL MAINTAIN POSITIVE DRAINAGE AWAY FROM ALL
- 5. THE LANDSCAPE CONTRACTOR SHALL SUPPLY ALL PLANT MATERIALS IN QUANTITIES SUFFICIENT TO COMPLETE ALL PLANTINGS SHOWN ON THIS
- 6. ALL MATERIALS SHALL CONFORM TO THE GUIDELINES ESTABLISHED BY THE AMERICAN ASSOCIATION OF NURSERYMEN.
- 7. ALL PLANTS SHALL BEAR THE SAME RELATIONSHIP TO FINISH GRADE AS TO ORIGINAL GRADES BEFORE DIGGING.
- 8. ALL PLANTS TO BE BALLED IN BURLAP OR CONTAINERIZED.
- 9. THE LANDSCAPE CONTRACTOR SHALL GUARANTEE ALL PLANT MATERIALS FOR ONE (I) FULL YEAR FROM DATE OF ACCEPTANCE.
- 10. ALL PLANT MATERIALS ARE SUBJECT TO THE APPROVAL OF THE LANDSCAPE ARCHITECT, AT THE NURSERY, AND AT THE SITE.
- II. LANDSCAPE ARCHITECT TO FLAG ALL TREES TO BE TRANSPLANTED PRIOR TO CONSTRUCTION START.
- 12. ALL AREAS OF THE SITE WHICH HAVE BEEN DISTURBED AND NOT OTHERWISE DEVELOPED SHALL BE LOAMED AND SEEDED.
- 13. SCREENED IMAGES SHOW EXISTING CONDITIONS. WHERE EXISTING CONDITIONS LIE UNDER OR ARE IMPINGED UPON BY PROPOSED BUILDINGS AND OR SITE ELEMENTS, THE EXISTING CONDITION WILL BE REMOVED, ABANDONED AND OR CAPPED OR DEMOLISHED AS
- 14. ALL PLANT BEDS TO RECIEVE THREE (3") INCH DEPTH OF MULCH AND/OR LANDSCAPE STONE AND WEED FABRIC. COORDINATE WITH LANDSCAPE ARCHITECT & OWNER ON FINAL PLACEMENT.

IRRIGATION NOTES

- THE CONTRACTOR SHALL BE REQUIRED TO FURNISH AND INSTALL ALL MATERIALS NECESSARY TO COMPLETE THE AUTOMATIC IRRIGATION SYSTEM.
- ALL WORK SPECIFIED SHALL BE EXECUTED IN ACCORADNCE WITH ALL GOVERNING ORDINANCES, LAWS AND REGULATIONS.
- SPRAY SPRINKLERS ARE TO BE USED FOR ALL LAWN AREAS.
- 4. ALL PLANT BEDS, SHRUBS AND TREES SHALL HAVE DRIP IRRIGATION.

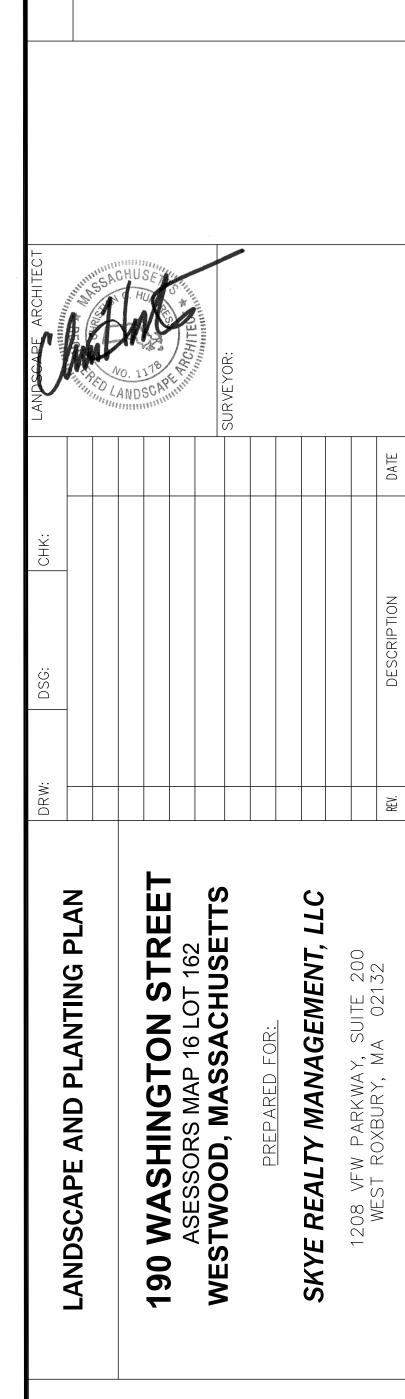

Marchionda & Associates, L.P. Engineering and Planning Consultants

62 Montvale Avenue Stoneham, MA 02180 TEL: (781) 438-6121 FAX: (781) 438-9654 Email: engineering@marchionda.com Website: www.marchionda.com


DATE: 4/12/23


.\PROJECTS\1014-01..\PLANS\ 1014-1 SITE BASE.DWG M. & A. NO.: 1014-01 SCALE: 1"=10'


SHEET L-1


PERMITTING PLANS

NOT FOR CONSTRUCTION

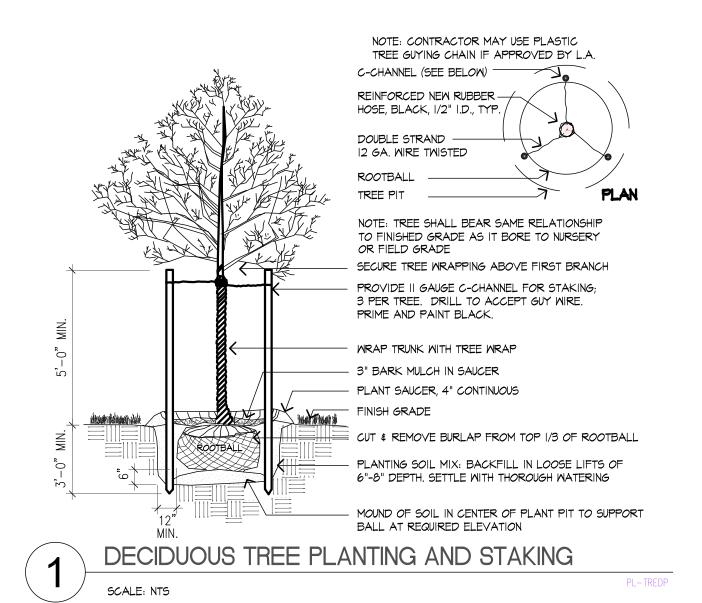

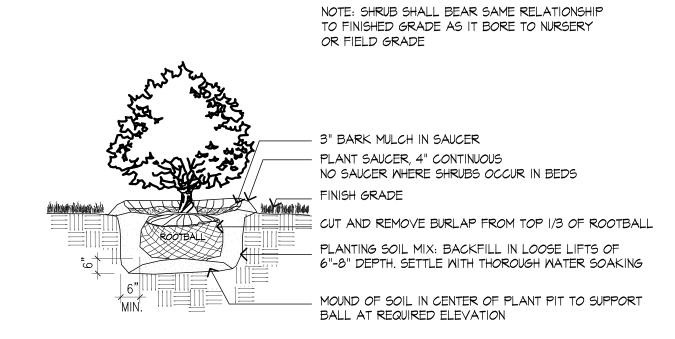

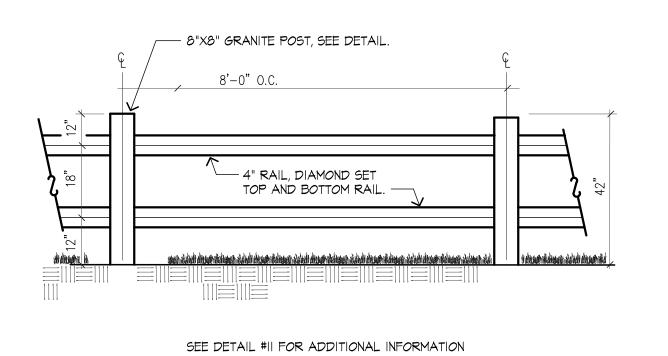


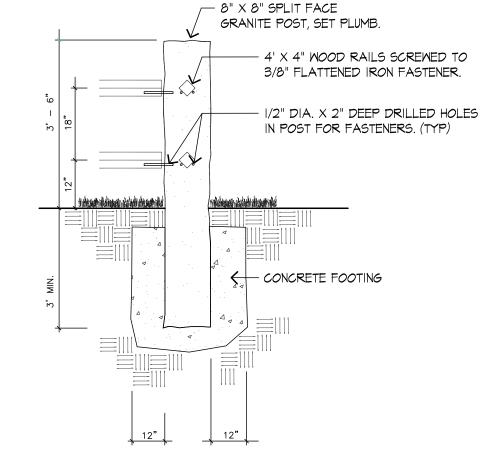








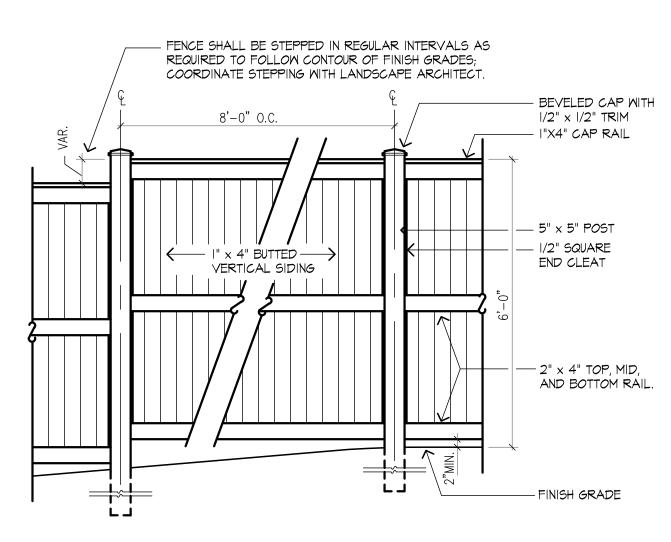



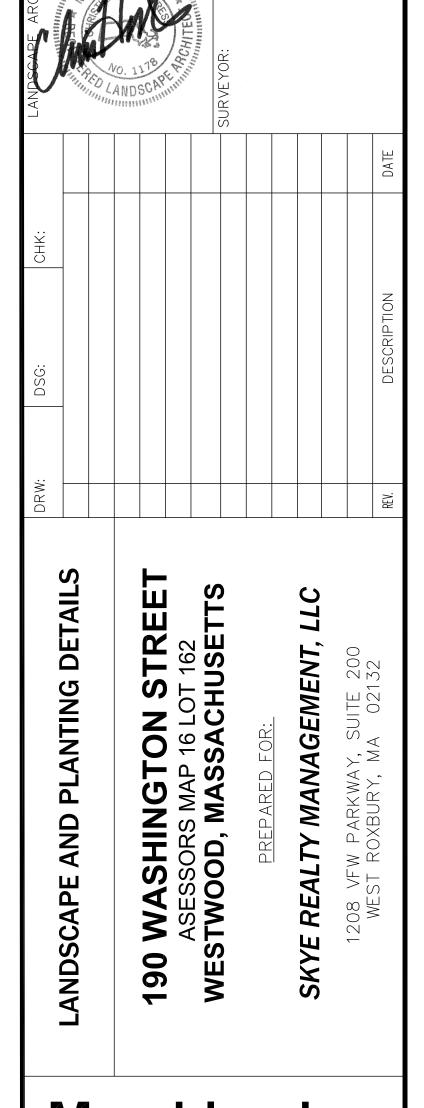

PERMITTING PLANS

NOT FOR CONSTRUCTION

DATE: 4/12/23
..\PROJECTS\1014-01..\PLANS\ 1014-1 SITE BASE.DWG
M. & A. NO.: 1014-01 SCALE: 1"=10'

SHEET L-2

Website: www.marchionda.com

Stoneham, MA 02180
TEL: (781) 438—6121
FAX: (781) 438—9654
Email: engineering@marchionda.com

& Associates, L.P.

Engineering and Planning Consultants

62 Montvale Avenue